

### Fountain nozzles | 1 inch



**Blossom 1 in.**                      **Bell 1 in.**

37 jets, 3 steps, 1/16 in. jet diameter,	Particularly suited for small areas;
Material: Plastic	Material: Plastic

**Pumps**

	Ø inch	H inch	Ø inch	H inch
Nautilus 1100	32 in.	50 in.	36 in.	—
Nautilus 1600	60 in.	87 in.	60 in.	—
Nautilus 2100	70 in.	107 in.	—	—
Nautilus 2600	100 in.	166 in.	—	—

<b>Part Number</b>	<b>55882</b>	<b>55881</b>
<b>MSRP</b>	<b>CDN \$ 59.98</b>	<b>CDN \$ 59.98</b>




Accessories:  
**Telescopic nozzle extension TE 5 K**  
 for mounting fountain attachments with G-1/2 connection.  
 Connection:  
 G-1/2 exterior thread, length: 6 - 11 in., telescopic extension.

<b>Part Number 53228</b>
<b>CDN \$ 15.98</b>



Accessories:  
**Telescopic nozzle extension TE 10 K**  
 for mounting fountain attachments with G-1 inch connections.  
 Connection:  
 G-1 inch external thread, length: 11 - 20 in., telescopic extension.

<b>Part Number 53227</b>
<b>CDN \$ 39.98</b>

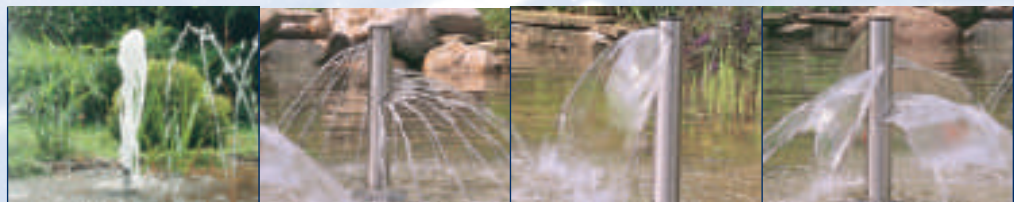

**Frothy 1 in.**                      **Spiral 22**                      **Wing 1**                      **Wing 3**

Aerator nozzle independent of water level, installed above or at water level	24 in. high, 22 jets in spiral arrangement Stainless Steel (47 in. diameter) can be achieved at a pump flow rate of 2000 gph.	24 in. high, fan pattern Stainless Steel The best water pattern (47 in. diameter) can be achieved at a pump flow rate of 800 gph.	24 in. high, triple fan pattern Stainless Steel The best water pattern (43 in. diameter) can be achieved at a pump flow rate of 1700 gph.
Material: Stainless steel			
Ø inch	H inch		
—	20 in.		
—	32 in.		
—	48 in.		
—	63 in.		

**Pumps**

Nautilus 1100	—	20 in.
Nautilus 1600	—	32 in.
Nautilus 2100	—	48 in.
Nautilus 2600	—	63 in.

<b>Part Number</b>	<b>53224</b>	<b>56510</b>	<b>56508</b>	<b>56509</b>
<b>MSRP</b>	<b>CDN \$ 129.98</b>	<b>CDN \$ 299.98</b>	<b>CDN \$ 299.98</b>	<b>CDN \$ 299.98</b>