

POWER-FLO™ Bubblers



PF 2
2 gph
(BLUE)



PF 6
6 gph
(BLACK)



PF 10
10 gph
(RED)



PF 20
20 gph
(GREEN)

The POWER-FLO™ Bubbler is an eight outlet pressure compensating bubbler with 1/4" barbed swivel outlets. It can be disassembled for cleaning or to change flow rates of certain ports. The POWER-FLO™ Bubbler can operate in the 20 to 80 psi pressure range.

The POWER-FLO™ Bubbler is available in 2, 6, 10 and 20 gph/outlet flow rates.

The flow rate of each port may be changed to meet the plants requirements. A plug is also available if a port is not going to be used.



PFFC 0
shut-off plug
(WHITE)



PFFC 2
2 gph
(BLUE)




PFFC 6
6 gph
(BLACK)



PFFC 10
10 gph
(RED)



PFFC 20
20 gph
(GREEN)

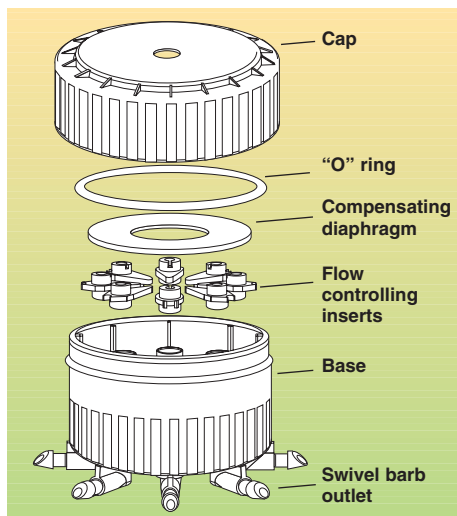

Features:

- 1/2" threaded inlet for ease of installation.
- Pressure compensating from 20 to 80 psi.
- Cap can be unscrewed for cleaning or to change flow controlling inserts.
- 1/4" barbed swivel elbows for use with standard 1/4" tubing (A 250 or A 250V)
- Can be used above grade or with an emitter access box (EB 6) below grade
- Cap is color coded (same as flow controlling inserts) for easy flow rate identification
- Unique built-in filter system

Changing flow rates:

1. Unscrew cap and remove pressure compensating diaphragm.
2. Extract flow controlling insert from port that needs to be changed.
3. Install desired flow controlling insert.
4. Replace diaphragm and screw cap back on.



Discharge Rates/Outlet



	PF 2	PF 6	PF 10	PF 20
20 psi	2.2 gph	5.7 gph	9.0 gph	16.4 gph
30 psi	2.4 gph	6.9 gph	10.4 gph	19.0 gph
40 psi	2.5 gph	7.7 gph	11.6 gph	22.1 gph
50 psi	2.6 gph	8.4 gph	13.1 gph	25.0 gph
60 psi	2.6 gph	9.1 gph	14.1 gph	26.7 gph
70 psi	2.6 gph	9.4 gph	14.8 gph	27.4 gph
80 psi	2.6 gph	9.5 gph	15.3 gph	28.2 gph

Tubing Length Recommendation

Distribution Tubing (A250)	25' max.	25' max.	25' max.	25' max.
DURA-FLO™ JR (12")	4' min. 10' max.	7' min. 15' max.	9' min. 18' max.	10' min. 22' max.
DURA-FLO™ JR (6")	2' min. 5' max.	3' min. 8' max.	5' min. 9' max.	6' min. 11' max.

Application:

Can be used for trees and shrubs. When used for ground cover or planter boxes, can be used in conjunction with DURA-FLO™ JR Dripperline.

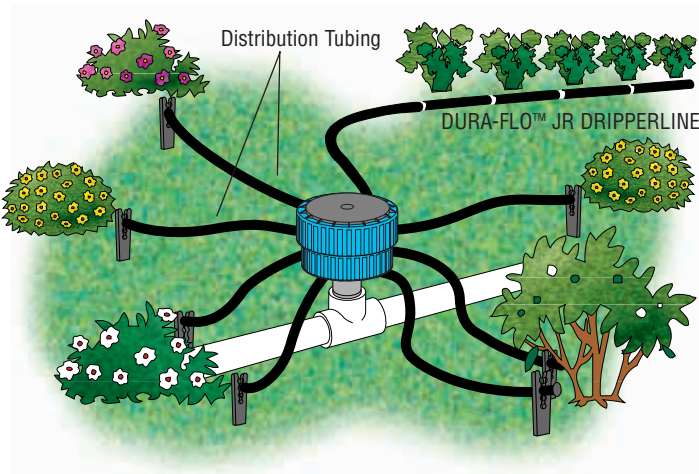

ABOVE GRADE

BELOW GRADE

